


Ground - Clip For Motorcycle Handlebars





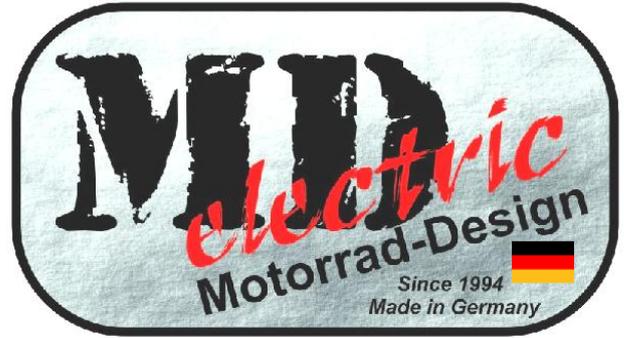


Vehicle Ground Clip

By installing and positioning the Ground – Clip with wire inside the handlebar it automatically taps ground from the handlebar. This makes it easy to acquire a simple connection to vehicle ground without running extra ground wires.


The Ground-Clip is hidden from sight inside the handlebar which ensures maximum design freedom for the professional builder. The position inside the handlebar also protects from moisture, dirt and harmful ambient conditions.

By installing the Ground-Clip it is no longer necessary to run any ground wires through and out of the handlebar. It is only required that the handlebar itself has a connection to ground (i.e. via solid mount risers or the stock wire that is connected to the riser bolt). Micro switches can be connected directly without an extra ground wire, this saves time and costs and the conversion is not limited by numerous wires that have to be run through the handlebars.

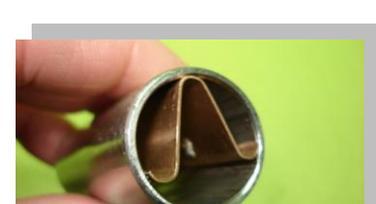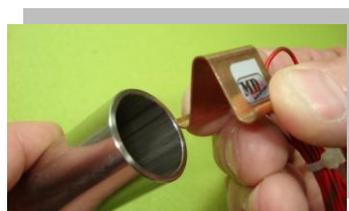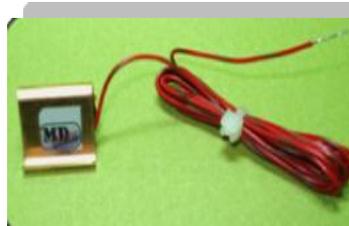

Lenker Innendurchmesser
min 19mmØ max 23mmØ

Ground - Clip Masse - Halter für Motorradlenker



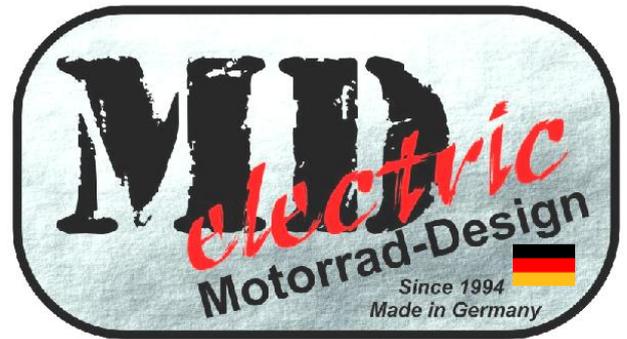


Fahrzeug Masse Abnehmer

Durch das Einführen und Positionieren des neuen Ground – Clips mit Massedraht im Inneren des Metalllenkers wird durch die Krallen des Ground-Clips automatisch die Masse am Lenker abgegriffen. Der Ground-Clip ermöglicht so eine einfache Verbindung mit der Fahrzeugmasse.

Der Ground-Clip ist optisch von Außen nicht sichtbar und gewährt dem professionellen Fahrzeugtuner höchste Freiheit bei der Gestaltung anspruchsvoller Kundenfahrzeuge. Die Lage im Inneren des Lenkers gewährt gleichzeitig auch einen optimalen Schutz gegen Feuchtigkeit, Verschmutzung oder anderen schädlichen Umwelteinflüssen.

Durch den Einsatz des neuen Ground-Clips benötigt man keinen zusätzlichen Massedraht im Lenker. Voraussetzung dafür ist lediglich, dass die die Masse (Ground) des Fahrzeuges am Lenker anliegt. Microtaster können so direkt ohne einen zusätzlichen Massedraht angeschlossen werden. Dieses spart Zeit und Kosten und man ist mit dem Aufbau der Elektrik flexibler und schneller.

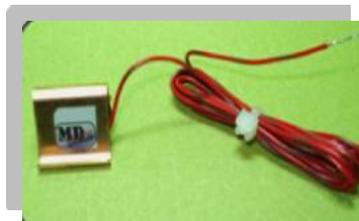

Lenker Innendurchmesser
min 19mmØ max 23mmØ